



BQ200 - Artic Snow




BQ240 - Beige Pearl



BS160 - Desert sand



BS170 - Emerald

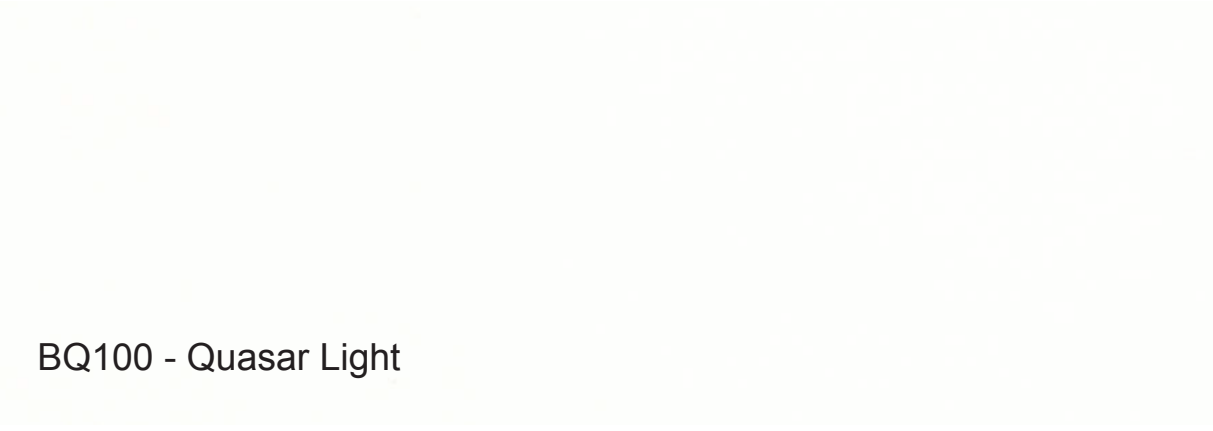

BQ100 - Quasar Light



BQ8805 - Cendre



BQ8437 - Jura Grey



BS4010 - Camellia



BS181 - Cascara




BS120 - Luna Sand




BS124 - Satinet



BQ2020 - Royal Gold

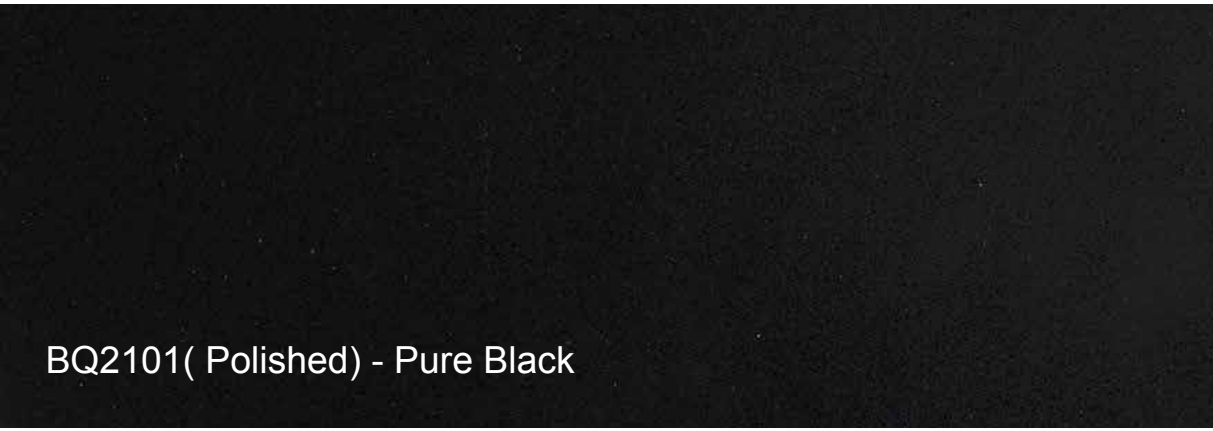

BQ2101(Polished) - Pure Black

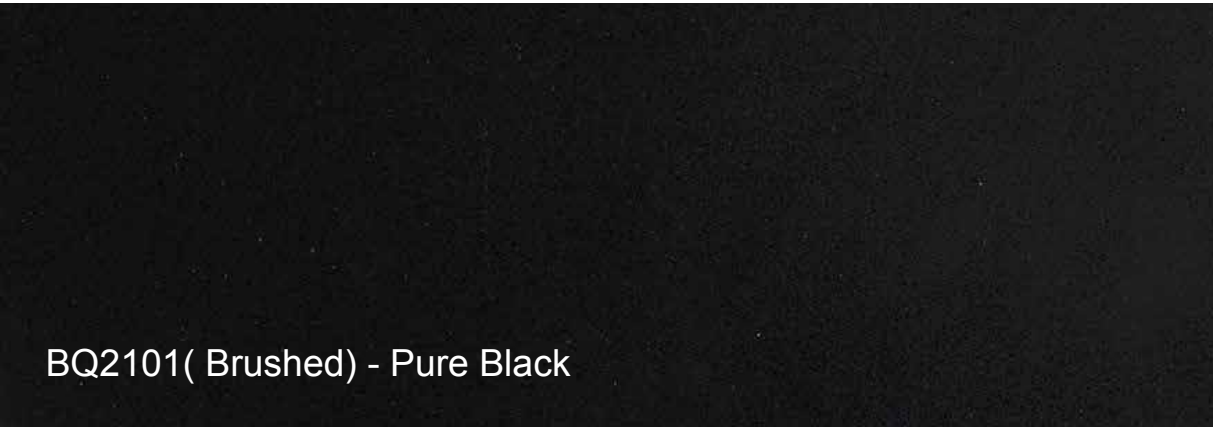

BQ2101(Brushed) - Pure Black





VICOSTONE JSC

Hoalac Hi - Tech Park, Hanoi, Vietnam

Tel: +84 423 477286

Fax: +84 433 686652

Hotline: +84 (0) 904386541

Email: info@vicostone.com

Website: www.vicostone.com

OUR DISTRIBUTOR



Microbial Resistance
ASTM D 6329-98

COLLECTION
CLASSIC

VICOSTONE®
QUARTZ SURFACES

VICOSTONE®
QUARTZ SURFACES



COLLECTION
CLASSIC


COLLECTION
CLASSIC

TECHNICAL SPECIFICATIONS

Specification	Test Method	Result
• Water Absorption (% by weight)	EN 14617-1	≤ 0,03% (W4)
• Density	EN 14617-1	2.2-2.4 gr/cm ³
• Flexural Strength	EN 14617-2	>40 MPa (F4)
• Impact Resistance	EN 14617-9	>3.0 J
• Compressive Strength	EN 14617-15	≥170 MPa
• Resistance to Deep Abrasion	EN 14617-4	≤195 mm ³
• Freeze-Thaw Resistance	EN 14617-5	No defects after 25 freeze-thaw cycles
• Mohs Scale of Hardness	EN101	6.0-7.0
• Slip Resistance at Honed 400	DIN 51130	R9-R10
• Microbial Resistance	ASTM D6329	Ranking 3 Resistant to Mold Growth
• Chemical Resistance to Acids	EN14617-10	Class C ₁
• Determination of Resistance to thermal shock	EN 14617-6	Δm%=0.06% ΔRf20%=-4.7%

FORMATS & SIZES

Standard Slab Sizes

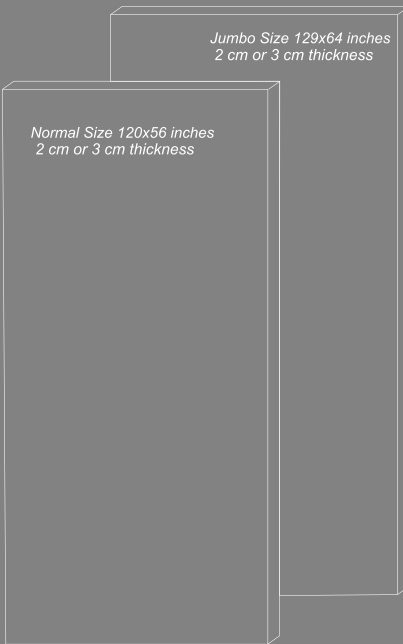

■ Cut to sizes are available on request